



EX360R S460RS Fully Automatic Roll-Feeding Paper Bag Machines




It is a one-time automatic production of paper bags with round rope handles by using printed roll paper as raw material, combined with handle paper sheets and paper ropes.

	 含手挽 With Handle	 无手挽 No Handle	 含手挽 With Handle	 无手挽 No Handle
Paper Roll Width	550-1170mm	400-1170mm	670-1470mm	630-1470mm
Max.Paper Roll Diameter	φ1200mm	φ1200mm	φ1200mm	φ1200mm
Core Diameter	φ76mm (3")	φ76mm (3")	φ76mm (3")	φ76mm (3")
Paper Thickness	80--170g/㎡	60--170g/㎡	90--170g/㎡	80--170g/㎡
Bag Body Width	200-360mm	125-360mm	240--460mm	220--460mm
Paper Tube Length	270--550mm	270--650mm	260--670mm	260--770mm
Bag Bottom Size	60-210mm	60-210mm	80--260mm	80--260mm
Handle Rope Height	100mm-120mm	—	100--120mm	—
Handle Rope Diameter	φ4--6mm	—	φ4--6mm	—
Handle Patch Length	152.4mm	—	190mm	—
Paper Rope Center Distance	76mm	—	95mm	—
Handle Patch Width	50mm	—	50mm	—
Handle Patch Roll Diameter	φ1200mm	—	φ1200mm	—
Handle Patch Roll Width	80--100mm	—	100mm	—
Paper Patch Thickness	100--180g/㎡	—	100--180g/㎡	—
Max Production Speed	150bags/min	200bags/min	120bags/min	150bags/min
Total Power	42KW		42KW	
Overall Dimension	13000x6000x3100mm		14500x6000x3100mm	
Total Weight	17000Kg		19000Kg	



EX 360RS/460RS Advantage

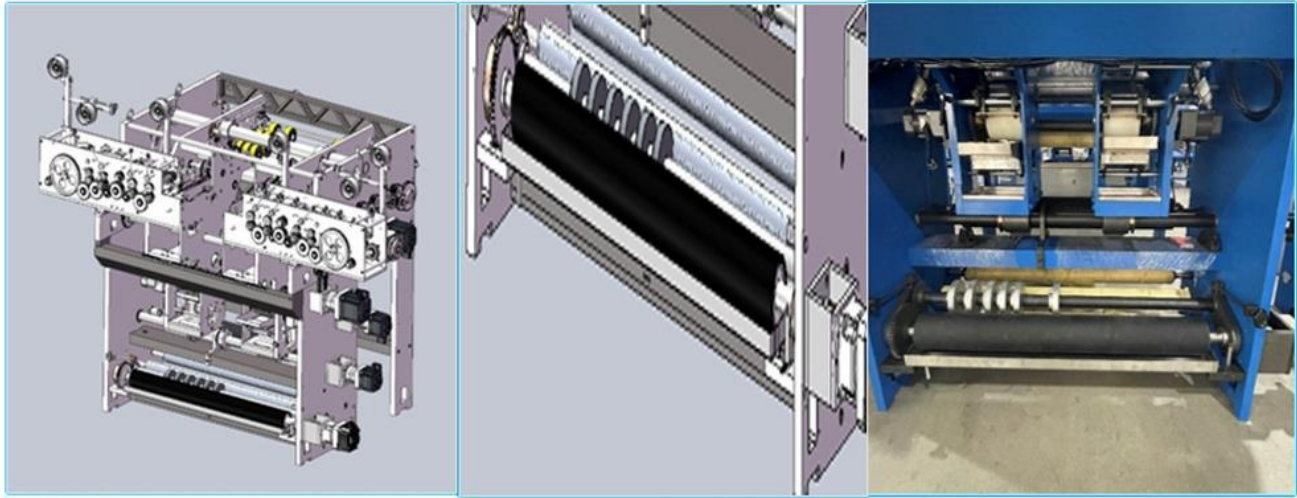

Paper roll fixed point humidification function: To avoid the bottom corner being pulled during production due to dry weather or insufficient paper moisture.



Bag tube forming part: Our machine can be adjusted according to the size of the bag tube. Manual adjustment, no need to change the model. So our design is greatly reduced. The adjustment time is convenient for customers to use, and the cost of replacing models for customers is also reduced.

Suitable Paper : 80-170gsm White Kraft Paper Or Brown Kraft Paper



含手挽 |← 670-1470mm →|
With Handle

无手挽 |← 630-1470mm →|
No Handle

手挽参数
Handle Size

